


## Removing and installing rear lid trim

### Removing

- Unscrew bolt -1- (1.5 Nm) in both handle recesses.
- Release trim from mountings in rear lid using wedge -T10383-.

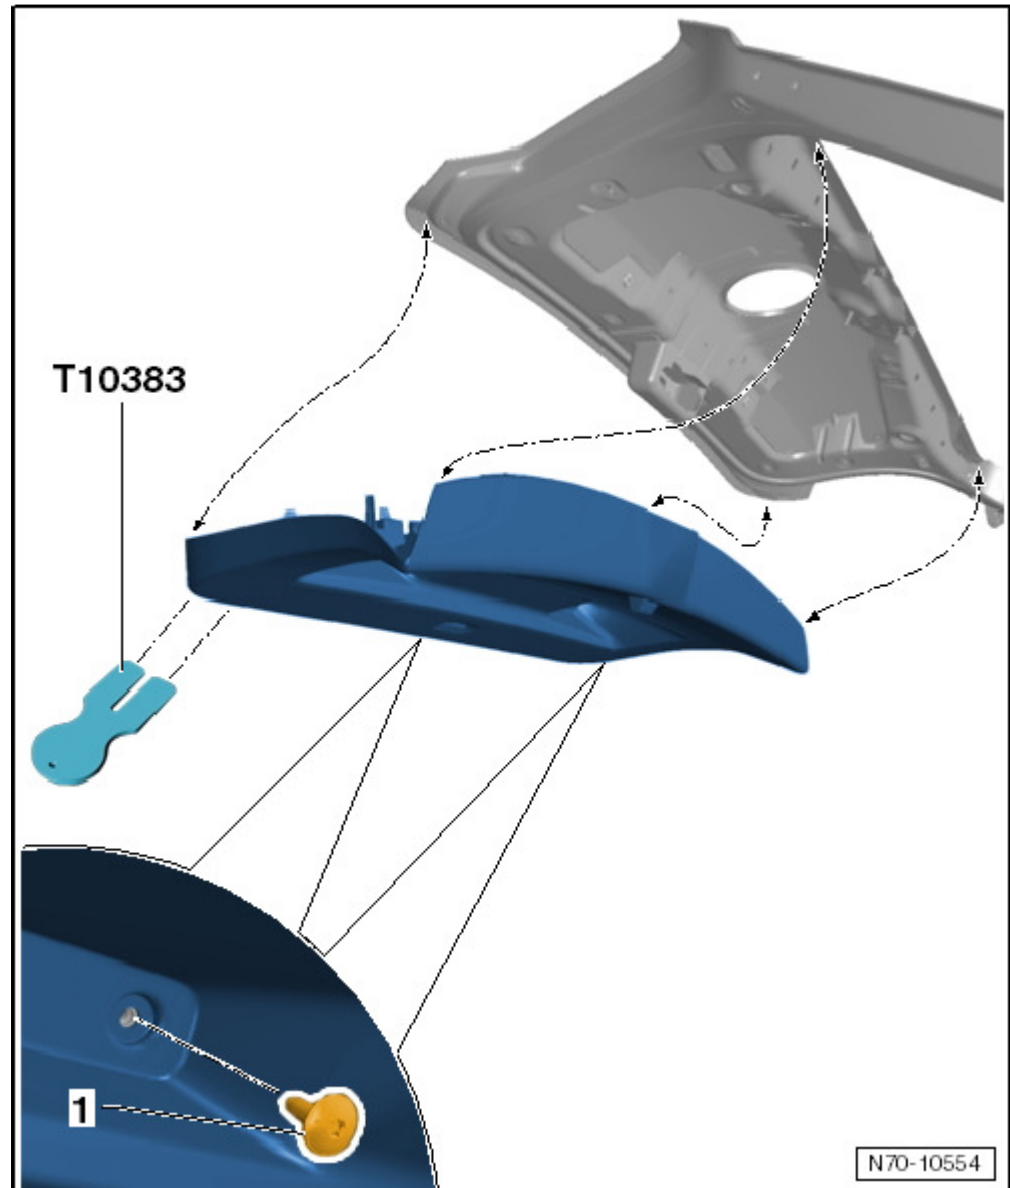

### Installing

- Install in reverse order of removal.

#### **Note**

*Before installing, check retaining clips for damage and renew if necessary.*